



Product Information Sheet



Sheet Number: **0064**
Rev 25-04-10



Roofbond Rustshield W

Acrylic water based anti- rust roof sealer

Features:

- Anti- Rust Primer
- Grey Colour
- Flexible
- Easy To Apply
- Promotes Adherence
- Pre Mixed
- Thermobond HRC compatible

Rustshield W is an acrylic anti-rust sealer/ primer designed to penetrate and prime in preparation for Roofbond roof coatings to follow. Rustshield W is airless sprayed using a 517 tip and is single pac coloured grey.



General Application Guide:

After cleaning and repairs, spray 1 coat of Rust Shield W with airless spray gun with a 517 tip

Colorbond®, Zinalume® and Rusty Galvinised roofs.

- Wire brush flaking or peeling paint.
- Waterblast roof clean with at least 3000 p.s.i
- Rustseal badly rusted areas and allow 24 hours to dry
- Apply one coat of Rustshield W with 517 airless tip- allow to dry
- Apply 2 coats of Roofbond Roofing Paint or Thermobond HRC Roof Paint with 521 airless tip

Specifications:

(dry times are considered at 25°)

Roofbond Rustshield W :

Surface Dry: 1/2-2 hours

Top Coat: 2-4 hours

Hard Dry: 3 -5 days

Wet Film Thickness: 120 microns


Dry Film Thickness: 60 microns

Thinning: No thinning required normally. If desired thin with water sparingly.

Clean Up: Clean up with water

Benefits:

- Excellent adhesion to most metals
- Environmentally friendly
- Allows for some substrate move-
- Airless Sprayed
- Water wash up
- High build Dry film
- Rust retarder sealer

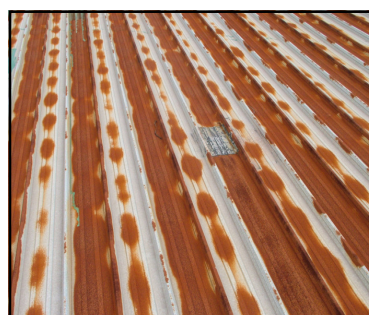

Top Picture: Rustshield W being sprayed over Galvanised metal roofing.

Bottom picture: Rusty Roof
Left Picture: Spraying Thermobond HRC roof paint over Rustshield W

Rustshield W comes in 15 litre pails.

See MSDS for safety information

Notes: There are many substrates on the market. Please consult Shieldcoat for further information regarding applications not on this sheet

Shieldcoat has become one of the first paint manufacturer in Australia to meet the international environmental standard, ISO 14001